

# **Technical Data Sheet**

#### **Controlled-Rate Freezer**

Revision-A

### Thermo Fisher Scientific, Asheville, North Carolina

	Model Number / Catalog Number	
Specifications	TSCM34XV	
	Application, Rating and Electrical Data	
Product	Thermo Scientific CryoMed Controlled-Rate Freezer General Purpose	
Application	Controlled Sample preparation for multiple biological sample types	
Electrical Power / Full Load Current	220V 50-60Hz / 7FLA	
Building Supply Rating	15A dedicated grounded non-GFCI circuit. Protected by circuit breaker rated for inductive loads	
Power Cord / Plug Length	CEE (7/7) / 8Ft	
Minimum Air Clearance Required	Add 2.8in. (7.1cm) to F-B for utilities and door handle	
Ambient Operating Conditions	15°C - 35°C Temperature Range, 20% - 85% RH (non condensing)	
Agency Listings	CE	
Application Environment	Indoor use only, Non-Corrosive, Non-Flammable, Non-Explosive, Good Air Ventilation	
	System Configuration	
Cooling Method	LN <sub>2</sub> injection using dual solenoid valve and LN <sub>2</sub> injection ring	
Heating Method	Tubular Heater 945W, 115V	
Operation Temp Range	+50°C to -180°C	
Temperature Freezing Rate	Minimum 0.1°C / minute; Maximum 99.9°C / minute (no load, T-couple in free air, center of chamber	
Temperature Warming Rate	Minimum of 0.1°C / minute; Maximum of 10.0°C / minute (same conditions as above)	
	Product Attributes	
No. of doors / Type of door	(1) Front access door opening left to right.	
Access Type / Sample Loading	Front Loading	
Use Interface / Display	Touch-Screen LCD	
Temperature Sensor	T-Type Thermocouple	
Companion Software	PC Interface Software	
Printer Capability	No Thermal Printer included	
Interior material	Stainless steel	
Exterior material	Stainless Steel powder-coat finish	
Freezing profiles	6 Presets, up to 14 Custom profiles with User Interface	
Door closure mechanism	T-handle high compression latch mechanism	
Insulation	Foamed in-place polyurethane insulation (HFC Free) and Teflon heat breaks	
	Dimensions and Construction	
Internal Chamber Capacity	34Liters / 1.2Cubic Feet	
Exterior Dimensions (W X H X D)	43.3 x 21.7 x 24.3in. (109.9 x 55.1 x 61cm)	
Interior Dimensions (W x H x D)	13 x 12 x 13in. (33 x 30.5 x 33cm)	
Unpacked Weight (lbs & kg)	174lbs / 79kg	
Packaged / Shipping Weight (lbs & kg)	230lbs / 104kg	
	Typical Performance Characteristics	
Chamber, Sample, Ambi	ient Bags Load Graph Details:	
24		035-B-4
	Test Number: 544	
	Ambient: 20C	
-30 -36 -36	Profile run: Prese	-
-48 -54 -60	Cabinet Loaded:	
-66 -72 -78	Load: 250ml cryo	-
-84 -90 -96	DMEM media, pla DMEM size ca	
24 10 0 6 10 10 10 10 10 10 10 10 10 10	TCO Number: 200 Test Number: 544 Ambient: 20C Profile run: Prese Cabinet Loaded: N Load: 250ml cryo DMEM media, pla respective size ca Temp Uniformity Energy consumpt	
-120 -132 -132	120 1226 132 132 132 132	
-138 -144 0:00:00 0:14:24 0:28:48 0:43:12 0:57:36 1:12:00	1.38 1.40 1.26:24 1.40:48 1.55:12 0.00:00 0:14:24 0.28:48 0:43:12 0:57:36 1:12:00 1:26:24 1:40:48 1:55:12 LN <sub>2</sub> Consumption	
1) Performance is nominal and indiv		
	ue to product amount, product size and operating conditions. nts may, without notice, result in amendments or omissions to this specification. The	ermo Scientifi

Continuous product enhancements may, without notice, result in amendments or omissions to this specification. Thermo Scientific cannot accept responsibility for damage, injury, loss or expenses resulting from misapplication of the information herein.
Temperature Uniformity is calculated based on the freezing of the first bag across a grid of bags instrumented with thermocouples.

5) Energy consumption information is an estimate based on test data from Preset Profile\_3 and should be considered as reference only.

© 2020 Thermo Scientific Inc. All trademarks are the property of Thermo Scientific Inc. and its subsidiaries. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representative for details.




# **Technical Data Sheet**

**Controlled-Rate Freezer** 

Revision-A

### Thermo Fisher Scientific, Asheville, North Carolina

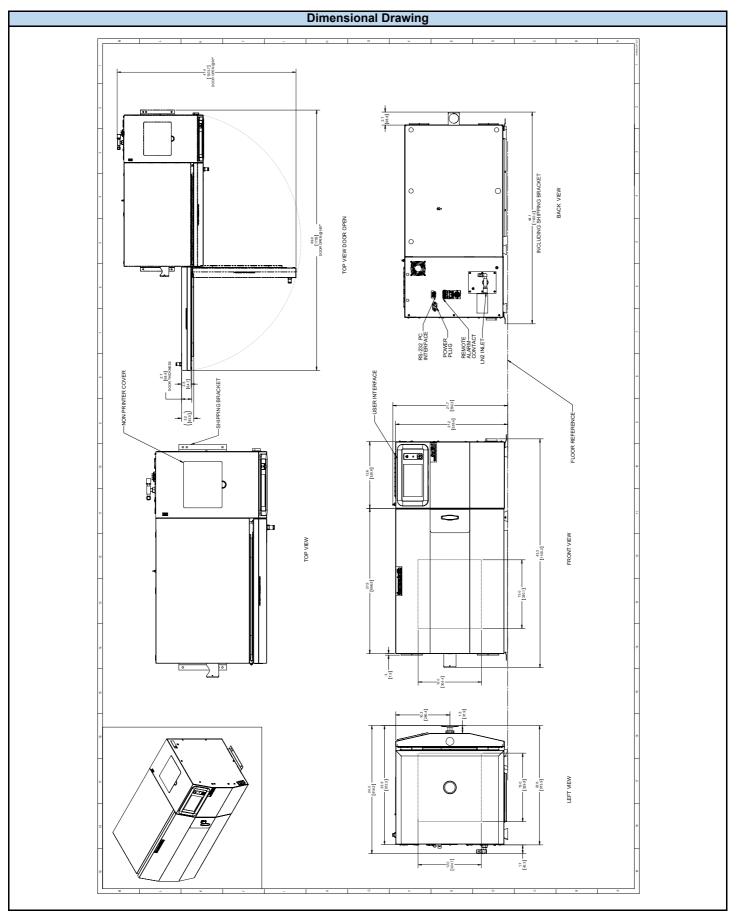

© 2020 Thermo Scientific Inc. All trademarks are the property of Thermo Scientific Inc. and its subsidiaries. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representative for details.