

KIMTECH™

Kimtech™ PFE-Xtra™ Latex Gloves



Provides **comfort**,
dexterity and
maximum flexibility

Excellent **tactile**
sensitivity


Fully textured for a
secure grip in wet or
dry conditions

Kimtech™ PFE-Xtra™ Latex Gloves are designed to be used under conditions where the risk of chemical splash exposure is high, with enhanced grip and flexibility, helping to provide seamless protection when and where it counts. These natural rubber latex gloves have a fully textured finish delivering excellent tactile performance in both wet and dry conditions, and beaded cuffs ensure the gloves are easy to don and doff. With a latex protein level of <math><50 \mu\text{g/g}</math> and compliant protection standards for viruses, microbiological hazards and chemical splash,

the Kimtech™ PFE-Xtra™ Latex Gloves are suitable for regular, rigorous use in a variety of applications.

In addition, the powder-free construction minimises contamination and drying effects on the wearer's skin, ensuring that users are protected as much as their applications and equipment. The non-sterile and disposable gloves also feature beaded cuffs for easy donning, and better seal formation with other garments.

Kimtech™ PFE-Xtra™ Latex Gloves

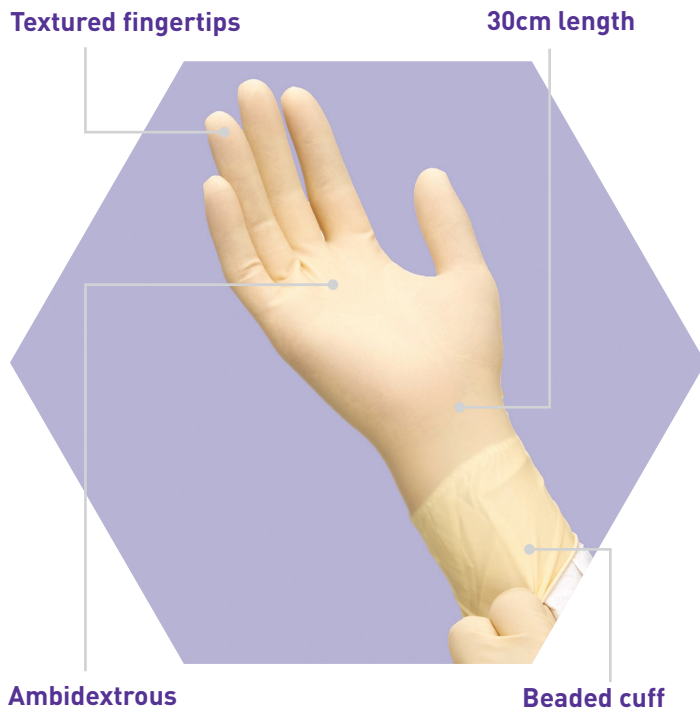

Key Features

- ▶ Textured palm and fingertips enhance grip and tactile sensitivity for safer and more efficient processes
- ▶ Beaded cuffs add strength to the gloves, reducing the risk of tearing and increasing their durability, while also reducing roll down for easier donning and doffing
- ▶ Powder-free to reduce the risks of skin irritation for the wearer
- ▶ Suitable for use in a range of laboratory environments and provided with supporting technical information to demonstrate regulatory compliance
- ▶ Gloves are non-sterile, ambidextrous and disposable

Assured Compliance

- ▶ PPE Cat III according to Regulation (EU) 2016/425
- ▶ EN ISO 374-1:2016 Type C (K) Chemical Splash protection
- ▶ EN 374-4:2014 Resistance to degradation by chemicals
- ▶ EN ISO 374-5:2016 Micro Organism and VIRUS Protection

Quality Standards

- ▶ Manufactured in accordance with ISO 9001 and ISO 13485

Size Guide

SIZE	CODE	LENGTH	QUANTITY 10x per case
S	50501	30cm	 50x per box = 500
M	50502	30cm	
L	50503	30cm	
XL	50504	30cm	



CE 0120

Product Specifications

CHARACTERISTIC	VALUE				TEST METHODS
- Freedom from holes	AQL 1.5 ²				EN 374-2:2014 and ASTM D 5151
TENSILE PROPERTIES	TENSILE STRENGTH		ULTIMATE ELONGATION		ASTM D 412, ASTM D 573 and ASTM D 3578
- Before aging	28 MPa, nominal		860% nominal		
- After accelerated aging	27 MPa, nominal		900% nominal		
DIMENSION	NOMINAL THICKNESS/WIDTH				ASTM D 3767, ASTM D 6319 and EN 420:2003 + A1:2009
Thickness (mm)	Middle finger	Palm	Cuff		
	0.26	0.22	0.17		
Palm width (mm)	Small 80	Medium 95	Large 111	X-Large 115	ASTM D 3767, ASTM D 6319 and EN 420:2003 + A1:2009

Visit us at www.kimtech.eu or for any questions, email: kimtech.support@kcc.com

¹ CAUTION: This product contains natural rubber latex which may cause allergic reactions. ² AQL as defined per ISO 2859-1 for sampling by attributes.